



# WB-500x200

WB-500x200-TB

Código: P13112.

- > Diámetro interior (mm): 500 x 200
- > Cable (m): -
- > In (A): 4000

## Especificaciones

### AC power supply, insulation

|                 |      |
|-----------------|------|
| Pulse test (kV) | 3 kV |
|-----------------|------|

### Mechanical characteristics

|                                  |                                          |
|----------------------------------|------------------------------------------|
| Size (mm) width x height x depth | 614 x 306 x 64 (mm)                      |
| Envelope                         | Polycarbonato autoextinguible UL 94 V0   |
| Fastening                        | Carril DIN con accesorio                 |
| Connection type                  | Terminal atornillable (tipo tornillo Pz) |
| Weight (kg)                      | 11                                       |

### Environmental characteristics

|                                          |                              |
|------------------------------------------|------------------------------|
| Protection class                         | IP 20 (Terminales) IEC 60529 |
| Relative humidity (without condensation) | 5 ... 95 %                   |
| Working temperature                      | -20 ... + 70 °C              |

### Current measurement circuit

|                                     |             |
|-------------------------------------|-------------|
| Dynamic current (Idyn)              | 2,5 Ith     |
| Permanent thermal current (Icth)    | 60 A        |
| Thermal short-circuit current (Ith) | 1,8 kA / 1s |
| Transformation ratio                | 30 / 0,06 A |
| Maximum operating voltage (Um)      | 720 V       |

### Standards

|                                          |         |
|------------------------------------------|---------|
| Electrical safety, Maximum height (m)    | 2000    |
| Electrical safety, Installation category | CAT III |

### Measurement accuracy

|          |             |
|----------|-------------|
| Accuracy | 10 ... 15 % |
|----------|-------------|

**WB**  
Transformador diferencial para relé tipo B

| CÓDIGO  | TIPO       | Diámetro interior (mm) | Cable (m) | In (A) |
|---------|------------|------------------------|-----------|--------|
| P13110. | WB-220x105 | 220 x 105              | -         | 1250   |
| P13111. | WB-350x150 | 350 x 150              | -         | 2000   |



# WB-500x200

Transformador diferencial para Relé diferencial tipo B

Código: P13112.

| CÓDIGO  | TIPO       | Diámetro interior (mm) | Cable (m) | In (A) |
|---------|------------|------------------------|-----------|--------|
| P13112. | WB-500x200 | 500 x 200              | -         | 4000   |




WB-500x200

Transformador diferencial para Relé diferencial tipo B

Código: P13112.

Dimensiones

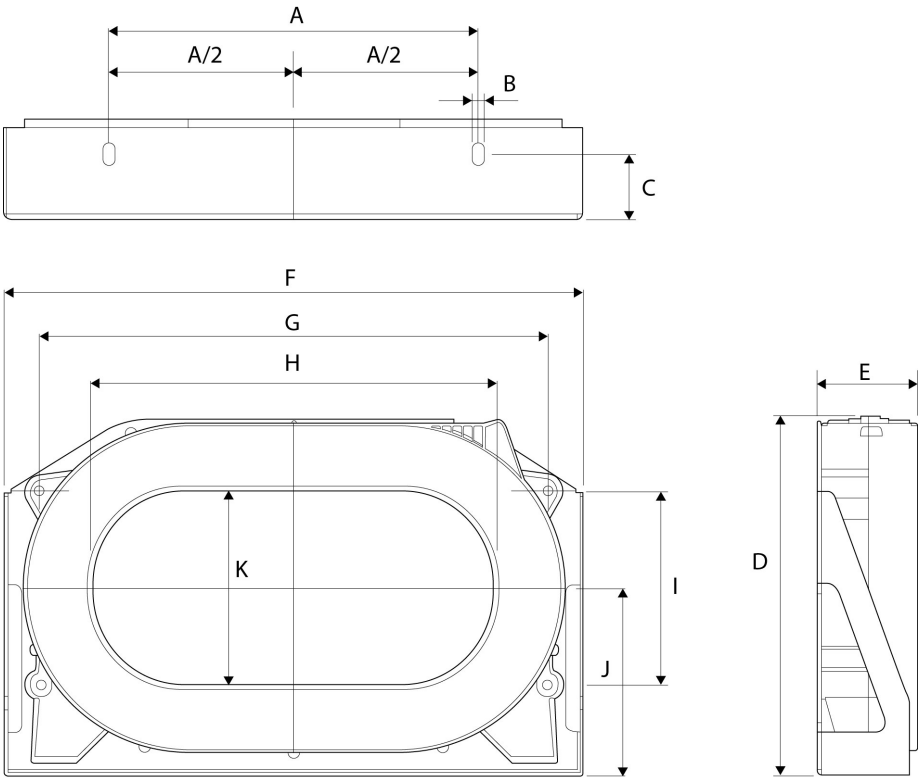

| Type        | A   | B | C  | D   | E    | F   | G   | H   | I   | J   | K   |
|-------------|-----|---|----|-----|------|-----|-----|-----|-----|-----|-----|
| WGC 220x105 | 200 | 7 | 35 | 195 | 54,2 | 314 | 275 | 220 | 105 | 102 | 105 |
| WGC 350x150 | 340 | 7 | 30 | 279 | 50,2 | 479 | 430 | 350 | 165 | 143 | 150 |
| WGC 500x200 | 460 | 7 | 40 | 306 | 64   | 614 | 550 | 500 | 180 | 155 | 200 |