

FB3T-5-63-00

FB3T-5-63-00, harmonic filter

Code: R78137. (CONSULTAR DISPONIBILIDAD)

- > System: Three-phase + Neutral
- > Frequency (Hz): 50
- > Max. neutral current: 63

Description

FB3 filters block 3rd order harmonics and have been designed to reduce these harmonics in installations with distorting singlephase loads.

Application

For single-phase loads, such as PCs, TFT screens, projectors, etc.



FB3T-5-63-00

Third harmonic blocking filter

Code: R78137.

Specifications

AC power supply

Frequency	50 Hz
Nominal voltage	Hasta 750 Vca

Mechanical characteristics

Size (mm) width x height x depth	370 x 420 x 370 (mm)
----------------------------------	----------------------

Environmental characteristics

Protection class	IP 00
Relative humidity (without condensation)	95%
Working temperature	-10 ... +50 °C

Electrical characteristics

Maximum transient current	1,5 (1 min every 10 min)
---------------------------	--------------------------






FB3T-5-63-00

Third harmonic blocking filter

Code: R78137.

Dimensions

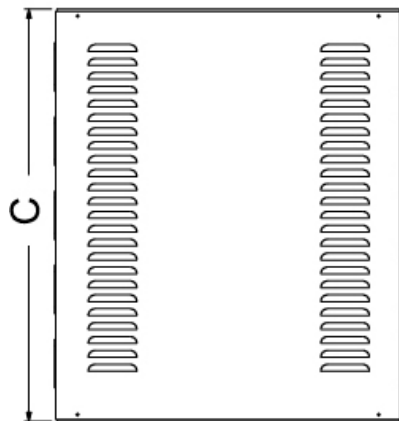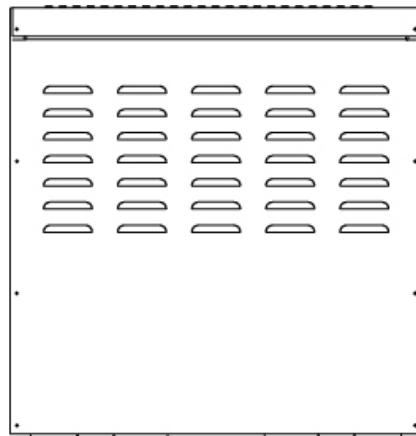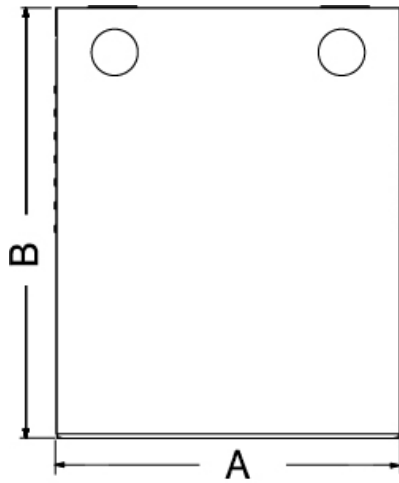

Type	A	B	C
FB3T-16	300	200	200
FB3T-50	370	280	300
FB3T-63	370	480	370
FB3T-100	650	1060	470