

## eCore GPRS Energy


eCore GPRS Energy, ESP32 controller

Code: D102100090000

- > Memory: 8 MB | 16 MB
- > Módulos: 7
- > Communications: RS232/485 | Ethernet | Wi-Fi | GPRS
- > Power supply: 85 ... 264 V~
- > CPU: ESP32 Dual-core 32-bit 240 MHz

### Description

Range of controllers designed for applications with real-time needs and strict cost requirements. ESP32 Technology, FreeRTOS Operating System, Modbus RTU/TCP and MQTT built in.

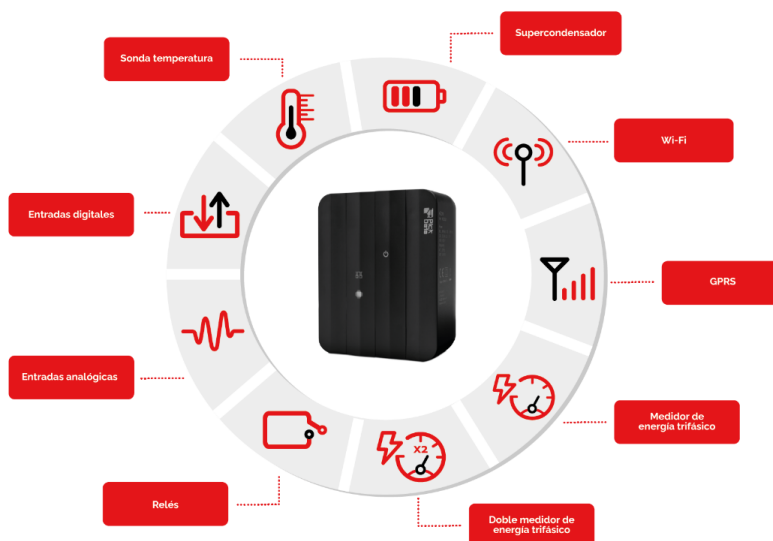



## eCore GPRS Energy

Code: D102100090000

### Specifications

#### AC power supply

Consumption	8,8 ... 10,5 VA
Frequency	47 ... 63 Hz
Nominal voltage	85 ... 264 V~

#### DC power supply

Consumption	6,4 ... 6,5 W
Nominal voltage	120 ... 300 Vdc

#### Electrical characteristics

Isolation level	3 kVac
-----------------	--------

#### Mechanical characteristics

Size (mm) width x height x depth	123 x 89 x 48 (mm)
Envelope	Polycarbonate UL94 - Self-extinguishing V2
Fastening	DIN rail 46277 (EN 50022)
Weight (kg)	1

#### Environmental characteristics

Protection class	IP 20
Relative humidity (without condensation)	5...95 %
Working temperature	-20...+50 °C

#### Current measurement circuit

Installation category	CAT III 300 V
Nominal current (In)	... / 250 mA
Phase current measuring range	2...120% de In
Maximum pulse current	3 x In A
Minimum current measurement	1 % In

#### Voltage measurement circuit

Installation category	CAT III 300 V
Input impedance	1 MΩ
Voltage measuring range	5 ... 120 % Un
Nominal voltage	285V Ph-N, 480V Ph-Ph

#### Communication Network

Technology / Interface	Ethernet 10/100 Mbps
------------------------	----------------------

#### Control Unit



## eCore GPRS Energy

Code: D102100090000

Clock	RTC
CPU	ESP32 Dual-core 32-bit 240 MHz
PSRAM Memory	8 MB
SPI Flash Memory	16 MB

### Standards

Electrical safety, Maximum height (m)	2000
Electrical safety, Installation category	CAT III 300 V
Electrical safety, Contamination level/class	Double-insulated electric shock protection class II (IEC 61010)
Standards	UNE EN 61010-1, UNE-EN 61000-6-2, UNE-EN 61000-6-4

### Electrical safety

Insulation	3 kVac
------------	--------

### Measurement accuracy

Reactive energy measurement (kvarh)	Class 2
Active energy measurement (kWh)	Class 1

### Radio communication -Antenna

	External
--	----------

### Radio communication

Band	850 / 900 / 1800 / 1900 MHz
Technology / Type	GPRS

### Serial communication

Technology / Type	RS-232 (full-duplex) / RS-485 (half-duplex)Galvanic isolation
-------------------	---

### Wireless communication

Band	802.11 b/g/n (2.4 GHz.)
Technology / Type	Wi-Fi

### eCore Energy

ESP32 controller

CODE	TYPE	CPU	Memory	Communications	Power supply
<b>eCore Energy</b>					
D102100090000	eCore GPRS Energy	ESP32 Dual-core 32-bit 240 MHz	8 MB   16 MB	RS232/485   Ethernet   Wi-Fi   GPRS	85 ... 264 V~