



eManager Pro (DC)


eManager Pro (DC), ARM controller

Code: D30001.

- > Memory: 512 MB | 8 GB eMMC
- > Módulos: 5
- > Communications: RS232/485 | Ethernet | Wi-Fi
- > Power supply: 9...36 Vdc
- > CPU: ARM Cortex A7 800 MHz

Description

eManager Essentials is an industrial IoT controller equipped with a high-performance control unit with an embedded Linux Yocto system and fully integrated Node-RED software. It includes RS-232/485, Ethernet and Wi-Fi communications. Two versions are available, **eManager** and **eManager Pro**, expandable with a wide range of expansion modules.

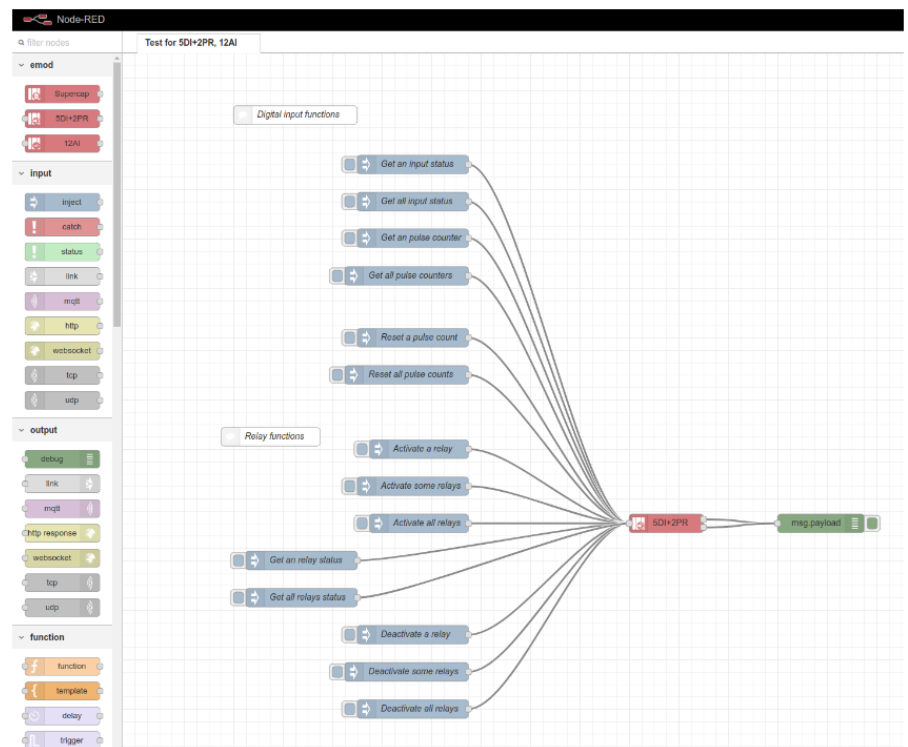



eManager Pro (DC)

Code: D30001.

Specifications

DC power supply

Consumption	0,5 ... 10 W
Nominal voltage	9...36 Vdc

Electrical characteristics

Isolation level	3 kVac
-----------------	--------

Mechanical characteristics

Size (mm) width x height x depth	88 x 89 x 48 (mm)
Envelope	Polycarbonate UL94 - Self-extinguishing V2
Fastening	DIN rail 46277 (EN 50022)
Weight (kg)	0,164

Environmental characteristics

Protection class	IP 20
Relative humidity (without condensation)	5...95 %
Working temperature	-20...+50 °C

Communication Network

Technology / Type	Ethernet 10/100 Mbps
-------------------	----------------------

Control Unit

Clock	RTC
CPU	ARM Cortex A7 800 MHz
PSRAM Memory	512 MB
SPI Flash Memory	8 GB eMMC

Standards

Electrical safety, Maximum height (m)	2000
Electrical safety, Installation category	CAT III 300 V
Electrical safety, Contamination level/class	Double-insulated electric shock protection class II (IEC 61010)
Standards	UNE EN 61010-1, UNE-EN 61000-6-2, UNE-EN 61000-6-4

Electrical safety

Insulation	3 kVac
------------	--------

Serial communication

Technology / Type	RS-232 (full-duplex) / RS-485 (half-duplex)Galvanic isolation
-------------------	---

Wireless communication

Band	802.11 b/g/n (2.4 GHz.)
------	-------------------------



eManager Pro (DC)

Code: D30001.

Technology / Type

Wi-Fi