



TP-58 200/5A

TP-58 200/5A, Split core current transformers

Code: M7012B.

- > Flat strip(mm): 50 x 80
- > System: Single-phase
- > Class 3 Power (VA): 3
- > Measurement Range (A): 200/5
- > Input current: 200 A
- > Transformer type: Split core

Description

Open-core transformers that can measure current without having to interrupt the electric supply. In other words, the installation does not have to be dismantled in order to install them.

- Range: 100 to 5000 A
- Busbar dimensions: 20 x 30 mm to 80 x 160 mm
- The transformer certificate is attached.

Application

Converting a high nominal current to a lower current so that it can be measured by the unit. They have a split core and can be installed with no need to interrupt the installation's power supply.



TP-58 200/5A

Split-core measurement current transformer

Code: M7012B.

Specifications

Electrical characteristics

Safety factor (SF)	FS 10
Power	3 VA (Class 3)

Mechanical characteristics

Size (mm) width x height x depth	145 x 114 x 50 (mm)
Weight (kg)	0,769

Environmental characteristics

Thermal Class	Class B (+130 °C)
Working temperature	-5 ... 40 °C

Specific technical characteristics of current sensors

Operating voltage	0,72 kV~ max.
-------------------	---------------

Current measurement circuit

Nominal frequency	50 / 60 Hz
Primary current measurement	200 A
Dynamic current (I _{dyn})	2,5 I _{th}
Thermal short-circuit current (I _{th})	60 I _n
Transformation ratio	... / 5 A

Standards

Standards	IEC 44-1, UNE 21 088-1, UL 94, VDE 0414
-----------	---

TP-vell

Current transformers, split core

CODE	TYPE	Measurement Range (A)	Flat strip(mm)	Class 0,5 Power (VA)	Class 1 Power (VA)	Class 3 Power (VA)
TP-58						
M7012B.	TP-58 200/5A	200/5	50 x 80	-	-	3

For other configurations see table of additional features




TP-58 200/5A

Split-core measurement current transformer

Code: M7012B.

Dimensions

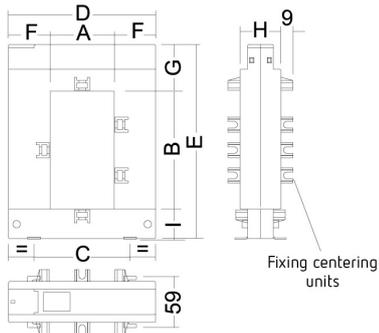

Dimensions (mm)	TP-58	TP-88	TP-812	TP-816
a	50	80	80	80
b	80	80	120	160
c	78	108	108	120
d	114	144	144	184
e	145	145	185	245
f	32	32	32	52
g	32	32	32	47
h	32	32	32	52
i	32	32	32	38