



## CBS-4C-RA

CBS-4C-RA, Central residual current protection

Code: P24912.

- > Communications: RS-485
- > N° relays: 4
- >  $I_{\Delta n}$  (A): 0,03 ... 30 A
- > Delay: 0,02...10 s, INS, SEL
- > Nr. reclosures: Programmable
- > Breaking element: Contactor
- > Type of protection: Type A

### Description

Unit equivalent to 4 residual current protection relays. 4 independent programmable relays available

4 inputs to connect the external toroidal transformers of the **WG / WGS / WGC**

Self-reclosing with programmable residual current trip in each channel

Superimmunized Type A relay with high frequency current filtering and high immunity. Monitoring in true root mean square (TRMS)

Reduced size: 3 modules

5 independent programmable outputs:

- 4 residual current trip outputs
- 1 end-of-reclosing-sequence interlocking output

Backlight display to show the information of the 4 channels:

- Adjustment values
- Instantaneous leakage current

Trip/external reset input

Automatic test of the connection and status of each external transformer

Optional RS-485 Communications: type **CBS-4C RA** and **CBS-4C RAL**

Assembly on DIN rail 46277 (**EN-50022**)

Optional assembly on 72 x 72 panel with accessory **M5ZZF1**.

### Application

CBS-4 RA or CBS-4 RAL allow an intelligent residual current protection, with greatly reduced dimensions. A contactor is available per channel, enabling the automatic reclosure after a trip, thus offering the most adequate solution for public lighting, cash machines, refrigeration chambers, traffic lights, etc. In addition, version CBS-4 C, with RS-485 communications, is used with the Power Studio software and it adds the centralised supervision in real-time, as well as a record log that can be analysed later on.



## CBS-4C-RA

Multipoint residual current system for measurement and signalling with external transformer of the WGS / WGS series

Code: P24912.

### Specifications

#### AC power supply

Consumption	6 VA
Frequency	50/60 Hz
Nominal voltage	230 V~ (± 20 %)

#### Mechanical characteristics

Size (mm) width x height x depth	52.5 x 85 x 67.9 (mm)
Envelope	Polycarbonate V0
Fastening	DIN (IEC 60715)
Weight (kg)	0,28

#### Environmental characteristics

Protection class	IP 41 (front), IP 20 (side and rear cover)
Relative humidity (without condensation)	5 ... 95 %
Storage temperature	-20 ... +55 °C
Working temperature	-10 ... +50 °C

#### Varistor characteristics

Maximum voltage	275 V~
-----------------	--------

#### External reset input for tripping

Type	Optocoupled
Maximum power	0,7 W
Maximum voltage	230 V~ ±20 %

#### Standards

Electrical safety, Maximum height (m)	2000
Standards	IEC 60947-2-M, IEC 62020, IEC 61008-1

#### User interface

LED	2
Keyboard	7 keys
Display type	LCD

#### Digital relay outputs

Nominal load in AC1	1500 VA
Nominal current	6 A ~
Nominal voltage	230 V ~



## CBS-4C-RA

Multipoint residual current system for measurement and signalling with external transformer of the WGS / WGS series

Code: P24912.

Maximum current	10 A ~
<b>Differential protection</b>	
Type	Type A ultra-immunised
Sensitivity ( $I_{\Delta n}$ ), A	0,03 ... 30
Delay time (t $\Delta$ )	Programmable: 0.02 ... 10s Inverse curve: Instantaneous or selective
Transformer	External, WG (WG/WGS/WGC) series
<b>Protection</b>	
Measure	True root mean square (TRMS)
Circuit breaker type	Contactors
<b>Serial communication</b>	
Protocol	Modbus/RTU
Technology / Type	RS-485

### CBS4-RA

Type A ultraimmunized 4 channels residual current relay with reconnection

CODE	TYPE	$I_{\Delta n}$ (A)	Breaking element
P24911.	CBS-4 RA	0,03 ... 30 A	Contactors
P24912.	CBS-4C-RA	0,03 ... 30 A	Contactors

Requires an residual current transformer, WGC type (not included). The breaking element to be associated must be a contactor not included.  
To encode other parameters, see the table at the end of the section




# CBS-4-RA

Multipoint residual current system for measurement and signalling with external transformer of the WGS / WGS series

Code: P24912.

## Dimensions

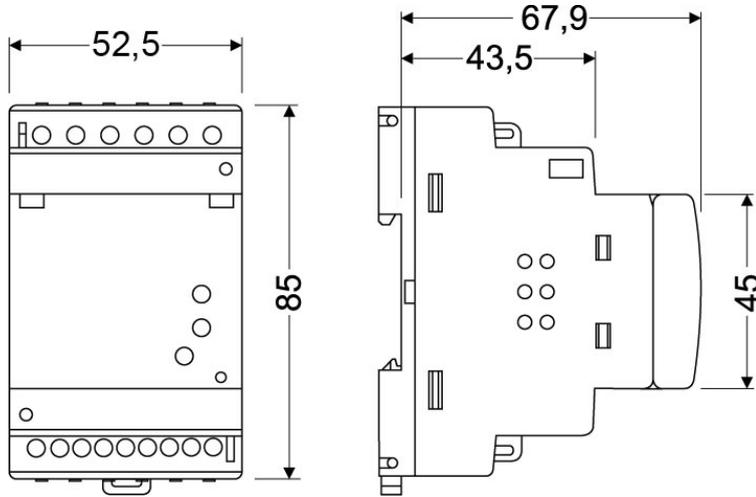

## Connections

