



## RECmax P-D2-16

RECmax P-D2-16, Motorized circuit breaker, 2-pole D-curve

Code: P28132. DESCATALOGADO

- > Poles: 2
- > In (A): 16 A
- > Curve: D

### Description

The RECmax P series are 2- and 4-pole circuit breakers connected to a compact motor and internal control unit that enables automatic reclosing.

After triggering, the switch recloses following a sequence of 3 reclosures, with 3 minutes between resets. If the unit is not able to reclose after 3 attempts, it remains triggered until a manual or remote reset is made.

Can also be connected remotely to an external control. It has two inputs which, via voltage-free external signals, order the opening (input O) and subsequent closing (reclosing) of the circuit breaker (input I).

They serve as protection against short-circuits and overloads, and can also be used as a remote circuit breaker. The switch status is indicated by LED signals on the front panel of the unit. A green ON LED indicates that the unit is in service; a red OFF LED indicates that the unit has been tripped. A TEST/RESET of the unit can be performed by pressing a button to check the tripping and subsequent rearming of the unit. It also features two single-contact outputs for signalling the status and the cause of the opening and closing of the circuit breaker (trip, manual/test).

### Application

The RECmax P series are motorized circuit breakers that can be rearmed automatically or controlled remotely, suitable for any application in which remote connection/disconnection control is required.

They are an essential accessory for automatic circuit breaker and residual current reclosing and protection, and for external control of connection/disconnection.



## RECmax P-D2-16

Motorised self-resettable circuit breaker (up to 63 A)

Code: P28132.

### Specifications

#### AC power supply

Installation category	CAT III 300 V
Consumption	4,5 VA
Frequency	50 / 60 Hz.
Nominal voltage	230V ~ ± 30%

#### Mechanical characteristics

Size (mm) width x height x depth	79 x 110 x 83 (mm)
Envelope	Plastic V0 polycarbonate + GF
Fastening	DIN 46277 (EN 50022)
Weight (kg)	0,433

#### Environmental characteristics

Protection class	Motor: IP 40 (DIN 40050) / RECmax MP: IP 20
Relative humidity (without condensation)	5 ...95 %
Working temperature	-20 ... +70 °C

#### Standards

Electrical safety, Maximum height (m)	2000
Standards	IEC 60898, IEC 60947-2

#### Motor

Frequency (Hz)	50 / 60
Absorbed power	10 VA
Tripping / motor reclosure time	< 10 ms / < 1000 ms
On / off pulse time	> 10 ms / > 10 ms
Maximum voltage	420 V ~
Minimum voltage	90 V ~
Nominal voltage	230 V ~ ± 30 %
Electrical life	> 20000 operations

#### Digital relay outputs

Nominal current	0,25 A
Type	Simple contacts
Nominal voltage	230 V

#### Thermal-magnetic protection

Trip curve, Type	D
Nominal current I <sub>n</sub> (A)	16



## RECmax P-D2-16

Motorised self-resettable circuit breaker (up to 63 A)

Code: P28132.

Number of mechanical / electrical manoeuvres	> 20000 / 10000
Ultimate short-circuit breaking capacity (Icu) / service short-circuit breaking capacity (Ics), in DC (IEC 60947-2)	30 kA
DC voltage breaking capacity (IEC 60947-2)	< 125 V
AC ultimate short-circuit breaking capacity (Icu) (IEC 60947-2)	20 kA
V~ Breaking capacity (IEC 60947-2)	240 V ~
Minimum operating voltage UB min (V)	12 V ~
Nominal voltage	240 / 415 V ~

C/D curve circuit breakers with 6 kA cut off power (IEC 60898).




## RECmax P-D2-16

Motorised self-resettable circuit breaker (up to 63 A)

Code: P28132.

### Dimensions

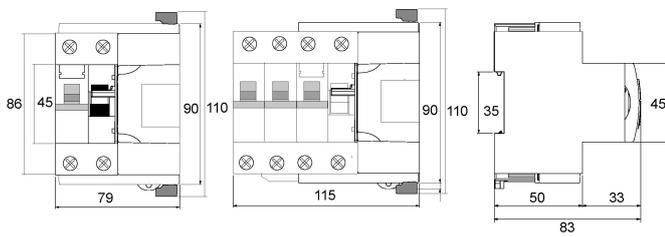

### Connections

