



CM-GSM/3G

CM-GSM/3G, RS-232/RS-485 GSM/3G Modem,

Code: Q30251. DESCATALOGADO

Specifications

Auxiliary power supply

Voltage	9 ... 24 Vdc
---------	--------------

Mechanical characteristics

Size (mm) width x height x depth	66.8 x 37.2 x 78.1 (mm)
Envelope	PC/ABS Plastic
Weight (kg)	0,25

Environmental characteristics

Protection class	IP 30
Relative humidity (without condensation)	10 ... 90 %
Storage temperature	-40 ... +85 °C
Working temperature	-30 ... +80 °C

Standards

Electrical safety, Maximum height (m)	2000
Standards	Directive 2006/95/EC, ETSI EN 301 511 V9.0.2, ETSI EN 301 489-1 V1.8.1, ETSI EN 301 489-7 V1.3.1, IEC/EN 60950-1:2005, EN60950-1:2006+A11:2009

User interface

LED	1 LED indications
-----	-------------------

Memory

Write time	400 kB (RAM) & 1.7 MB (Flash)
Type	SIM card interface

Radio communication -Antenna

	Antenna: GSM FMEM connector, RS-232: DB9 female connector, RS-485: 5 poles connector
--	--

Radio communication

Band	GSM/3G:Quad band, 850/900/1800/1900 MHz
Technology / Type	3G

CM-GSM
Modems

CODE	TYPE	Description
Q4994E.	ANTENA	Antenna 9 dB (for GSM modem)



CM-GSM/3G


Code: Q30251.



CM-GSM/3G

Code: Q30251.

Dimensions

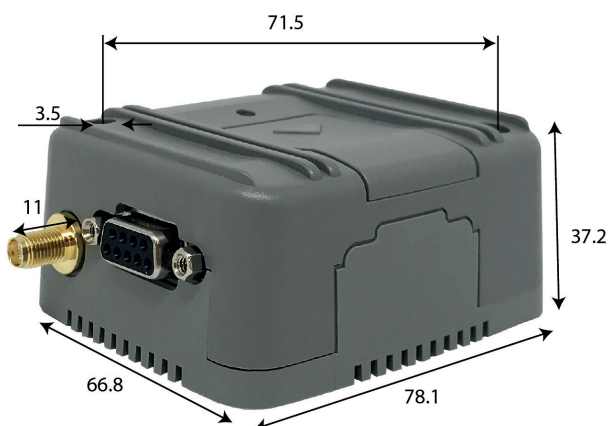

Connections

