



## R-SABT

---

R-SABT, Advanced low voltage remote monitoring,

Code: Q46300.

### Description

---

R-SABT is the device that collects data from T-SABT line monitoring cards, and that also measures the quality of supply and detects ground leakage. The device communicates with T-SABT cards via RS-485.



## R-SABT

Advanced low-voltage remote monitoring

Code: Q46300.

### Specifications

#### AC power supply

Installation category	CAT III 300 V
Consumption	7 VA
Frequency	50 Hz
Nominal voltage	100 ... 265 V ~

#### Mechanical characteristics

Size (mm) width x height x depth	216.5 x 132 x 121 (mm)
Envelope	V0 self-extinguishing plastic
Weight (kg)	1

#### Environmental characteristics

Protection class	IP 2XB
Relative humidity (without condensation)	5 ... 95 %
Storage temperature	-25 ... +70 °C
Working temperature	-10 ... +60 °C

#### Current measurement circuit

Installation category	CAT III 300 V
Nominal current (I <sub>n</sub> )	1 A
Phase current measuring range	1 mA ... 2 A
Maximum input current consumption	0.02 VA
Maximum pulse current	20 I <sub>n</sub> (< 1s)
Minimum current measurement	1 mA

#### Voltage measurement circuit

Installation category	CAT III 300 V
Input impedance	800 kΩ
Frequency measuring range	45 ... 65 Hz
Voltage measuring range	127/220 ... 230/400 V ~ ± 20 %
Maximum input voltage consumption	0.07 VA
Minimum measurement voltage (V <sub>start</sub> )	1 V ~

#### Communication Network

Protocol	DLMS
Technology / Interface	Ethernet 10/102

#### Standards

Electrical safety, Maximum height (m)	2000
---------------------------------------	------



## R-SABT

Advanced low-voltage remote monitoring

Code: Q46300.

Electrical safety, Installation category	CAT III 300 V
Standards	UNE-EN 61000-4-2, UNE-EN 61000-4-3, UNE-EN 61000-4-4, UNE-EN 61000-4-5, UNE-EN 61000-4-6, UNE-EN 61000-4-8, UNE-EN 61000-4-10, UNE-EN 61000-4-18, UNE-EN 61000-6-2, UNE-EN 60068-2-1, UNE-EN 60068-2-2, UNE-EN 60068-2-14, UNE-EN 60068-2-78, UNE-EN 60255-27, UNE-EN 60870-2-1, UNE-EN 61709, UNE-EN 62059-31-1, UNE-EN 61000-4-30
<b>User interface</b>	
LED	12 indication LED
<b>Measurement accuracy</b>	
Phase current measurement	0.2 %
Phase voltage measurement	0.2 %
<b>Processor</b>	
Sampling frequency	600 MHz
<b>Serial communication</b>	
Protocol	DLMS
Technology / Type	RS-485

### R-SABT

Advanced Low-voltage Remote Monitoring

CODE	TYPE	Description
<b>Advanced Low-voltage Remote Monitoring</b>		
Q46300.	R-SABT	Advanced low voltage remote monitoring




# R-SABT

Advanced low-voltage remote monitoring

Code: Q46300.

## Dimensions

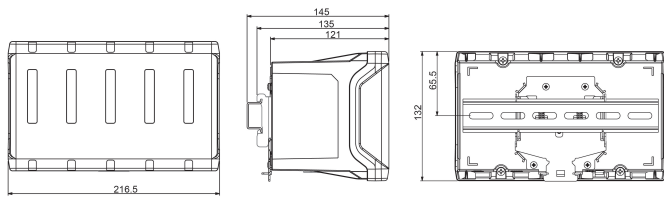

## Connections

