CLZ-FPT-44/2,5-HD

CLZ-FPT-44/2,5-HD, Three-phase tubular power capacitor

Code: R2H542.

> Terminal: F
> Frequency (Hz): 50
> kvar (400 V): 2
> kvar (440 V): 2,5
> Use voltage (V): 400 | 440

Description

CLZ-HD (Heavy duty) capacitor range is composed of capacitors with a tubular casing, of the dry-type, covering a wide range of power and voltage ratings, at 50 and 60 Hz. The **CLZ-HD** capacitors are designed to be installed in installations with extreme working conditions. The design, manufacturing and testing processes guarantee the production of top quality and long lasting capacitors. Those **CLZ** capacitors offer a new refrigeration technology by means of nitrogen gas*, being a refrigerating system of high benefits, inert and non flammable.

Application

Its application is based on compensation in installations with static or variable loads (capacitor banks). Especially designed to be installed in roughly environments with the most extreme conditions due to its longer life and high temperature resistance.

Creation date: 07/10/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.

CLZ-FPT-44/2,5-HD

Tubular capacitor

Code: R2H542.

Specifications

AC power supply

Frequency	50 Hz

Electrical characteristics

Losses (W)	Dielectric: < 0,2 W / kvar Total: < 0,4 W / kvar
Discharge resistance	50 V / 1 min (0,5 - 30 kvar) 75 V / 3 min (33 - 50 kvar)
Surge	10 % 8h in 24 h 15 % up to 30 min in 24 hours 20 % up to 5 min in 24 hours 30 % up to 1 min in 24 hours
Tolerance C	-5 ... +10 %
Maximum phase current	400 x In
Maximum transient current	1,8 In
Voltage	440 V
Insulation voltage, circuit	3 / 12 kV

Mechanical characteristics

Size (mm) width x height x depth	63.5 x 140 x 63.5 (mm)
Envelope	Aluminum
Thermal management	Natural or forced according to cabinet design
Fastening	M12 fastening screws earth conductor
Weight (kg)	0,53

Environmental characteristics

Relative humidity (without condensation)	95%
Installation, location, position.	Vertical / Horizontal. Minimum distance between condensers 2 cm.
Working temperature	Tª class D: Daily average: 45 °C, annual average: 35 °C, maximum: 65 °C, minimum: -50 °C

Standards

Certifications	VDE 560
Electrical safety, Maximum height (m)	4000
Standards	IEC 60831-1-1/2, IEC 70/7, UNE 20827, UNE 20010, BS 1650

Protection

Circuit breaker type	Dielectric regeneration Expansion system

Creation date: 07/10/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.

CLZ-FPT-44/2,5-HD

Tubular capacitor

Code: R2H542.

CODE	TYPE	kvar (220 V)	kvar (230 V)	Use voltage (V)	kvar (400 V)	kvar (440 V)	kvar (460 V)	kvar (500 V)	kvar (525 V)	kvar (660 V)	kvar (690 V)
Terminal block, Un = 3 x 230 V / 50 Hz											
R2H516.	CLZ-FP-23/5-HD	4,6	5	230							
R2H517.	CLZ-FP-23/6,25-HD	5,7	6,25	230							
R2H518.	CLZ-FP-23/7,5-HD	6,8	7,5	230							
R2H51B.	CLZ-FP-23/10-HD	9,15	10	230							
R2H51D.	CLZ-FP-23/12,5-HD	11,4	12,5	230							
R2H51E.	CLZ-FP-23/15-HD	13,75	15	230							
Faston terminal, Un = 3 x 440 V / 50 Hz											
R2H541.	CLZ-FPT-44/1,25-HD			400 | 440	1	1,25					
R2H542.	CLZ-FPT-44/2,5-HD			400 | 440	2	2,5					
R2H543.	CLZ-FPT-44/3-HD			400 | 440	2,5	3					
R2H544.	CLZ-FPT-44/3,75-HD			400 | 440	3	3,75					
R2H546.	CLZ-FPT-44/5-HD			400 | 440	4	5					
R2H547.	CLZ-FPT-44/6,25-HD			400 | 440	5	6,25					
R2H848.	CLZ-FPT-44/7,5-HD			400 | 440	6,25	7,5					
Terminal block, Un = 3 x 440 V / 50 Hz											
R2H54B.	CLZ-FP-44/10-HD			400 | 440	8	10					
R2H54D.	CLZ-FP-44/12,5-HD			400 | 440	10	12,5					
R2H54E.	CLZ-FP-44/15-HD			400 | 440	12,5	15					
R2H54G.	CLZ-FP-44/18,2-HD			400 | 440	15	18,2					
R2H54J.	CLZ-FP-44/20-HD			400 | 440	16	20					
R2H54L.	CLZ-FP-44/25-HD			400 | 440	20	25					
R2H54N.	CLZ-FP-44/30-HD			400 | 440	25	30					
R2H54R.	CLZ-FP-44/40-HD			400 | 440	32	40					
R2H54S.	CLZ-FP-44/50-HD			400 | 440	40	50					
Faston terminal, Un = 3 x 460 V / 50 Hz											
R2H857.	CLZ-FPT-46/6,25-HD			460		5,7	6,25				
Terminal block, Un = 3 x 460 V / 50 Hz											
R2H55D.	CLZ-FP-46/12,5-HD			460		11,4	12,5				
R2H55E.	CLZ-FP-46/15-HD			460		13,7	15				
R2H55H.	CLZ-FP-46/19-HD			460		17,4	19				
R2H55L.	CLZ-FP-46/25-HD			460		22,9	25				
R2H55N.	CLZ-FP-46/30-HD			460		27,4	30				
R2H55P.	CLZ-FP-46/33.3-HD			460		30,5	33,3				
Faston terminal, Un = 3 x 525 V / 50 Hz											
R2H876.	CLZ-FPT-52/5-HD			525				4,5	5		
Terminal block, Un = 3 x 525 V / 50 Hz											
R2H579.	CLZ-FP-52/8-HD			525				7,25	8		

CLZ-FPT-44/2,5-HD

Tubular capacitor

Code: R2H542.

CODE	TYPE	kvar (220 V)	kvar (230 V)	Use voltage (V)	kvar (400 V)	kvar (440 V)	kvar (460 V)	kvar (500 V)	kvar (525 V)	kvar (660 V)	kvar (690 V)
R2H57B.	CLZ-FP-52/10-HD			525				9,1	10		
R2H57D.	CLZ-FP-52/12,5-HD			525				11,3	12,5		
R2H57E.	CLZ-FP-52/15-HD			525				13,6	15		
R2H57J.	CLZ-FP-52/20-HD			525				18,15	20		
R2H57L.	CLZ-FP-52/25-HD			525				22,7	25		
R2H57N.	CLZ-FP-52/30-HD			525				27,2	30		
R2H57P.	CLZ-FP-52/37,5-HD			525				34	37,5		
R2H57R.	CLZ-FP-52/40-HD			525				36,3	40		
R2H57S.	CLZ-FP-52/50-HD			525				45,4	50		
Terminal block, Un = 3 x 690 V / 50 Hz											
R2H598.	CLZ-FP-69/7,5-HD			690						6,9	7,5
R2H59B.	CLZ-FP-69/10-HD			690						9,15	10
R2H59D.	CLZ-FP-69/12,5-HD			690						11,4	12,5
R2H59E.	CLZ-FP-69/15-HD			690						13,7	15
R2H59J.	CLZ-FP-69/20-HD			690						18,3	20
R2H59L.	CLZ-FP-69/25-HD			690						22,9	25
R2H59N.	CLZ-FP-69/30-HD			690						27,5	30
R2H59R.	CLZ-FP-69/40-HD			690						36,6	40
R2H59S.	CLZ-FP-69/50-HD			690						45,75	50

All models are of the inert gas type, except for those with a 63.5 mm diameter and 136x355 mm size. The dimensions (dxh) are shown for the tube only. Please consult the dimensions drawing at the end of this section for more information about the actual dimensions. Terminal: maximum cross-section of type A cables: 16 mm2, type B: 25 mm2, type C: 35 mm2, F: Faston 6.3x0.8 mm and 12 A maximum current

Creation date: 07/10/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.

CLZ-FPT-44/2,5-HD

Tubular capacitor

Code: R2H542.

Dimensions

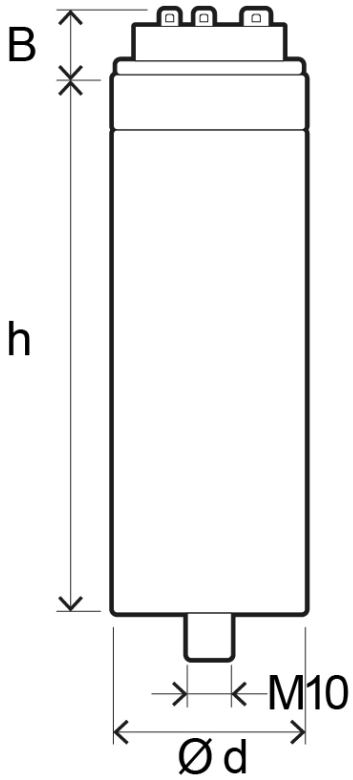



mm	d Ø	h	B	A Ø
63,5x98	63,5	98	13	68,5
63,5x127	63,5	127	13	68,5
63,5x175	63,5	175	13	68,5
63,5x202	63,5	202	13	68,5